

Low Penetration Rate Cooperative V2X Traffic Surveillance System

Jérôme Härri

Organised by:



Hosted by:



Main local partners:




ITS in your pocket

Proven solutions driving user services

Outline

COLOMBO

- COLOMBO proposes to develop advanced traffic light control based on local and distributed floating car data (D-FCD)
 - obtained directly from vehicles
- D-FCD is provided by COLOMBO's traffic surveillance systems
 - Assumes low penetration of cooperative V2X systems
 - Fully distributed approaches
- Classify vehicles in three classes as function of traffic sensing capabilities:
 - **Class A** – vehicles not participating to traffic surveillance
 - **Class B** – vehicles equipped with sensors but not C2X
 - **Class C** – vehicles equipped with C2X technologies
- Develop Traffic monitoring system from data gathering, fusion and dissemination of traffic data obtained from class B and C vehicles, assisted by infrastructure nodes

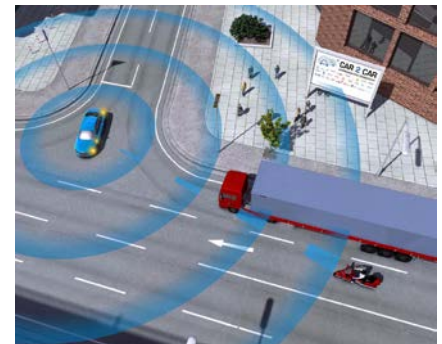

source: Car 2 Car Communication Consortium web site

Low Penetration Traffic Surveillance



- Low Penetration Rate Cooperative V2X Traffic Surveillance
 - Low C2X Penetration - < 3% C2X technology
 - Multiple types of GPS devices
 - C2X, smartphones
 - Rely on WiFi-Direct on smartphones
 - Drivers or pedestrian on sidewalk
 - Rely on Bluetooth devices on vehicular sensors
- Objective:
 - Traffic Volumes / Traffic Dynamics (speed) in given zones
- Approaches followed in COLOMBO WP1
 - **Clustering** –
 - Vehicles cluster and let a cluster-head estimate the cluster dynamics
 - **Data Fusion from heterogeneous traffic data** –
 - C2X data is fused with Smartphones and sensor data
 - **C2X Message Propagation** –
 - Vehicles send messages and estimate the density & speed from its propagation rate



source: Volvo for C2CCC




source: Car 2 Car Communication Consortium

Virtual Sensor Approach for Cooperative Traffic Surveillance

COLOMBO


- Virtual Sensors represent a zone where the traffic light needs traffic volumes
 - Virtual Sensors only have a 'virtual' existence from an artificial zone defining their coverage
- V2X vehicles (class C) in each zone will exchange traffic data to consolidate traffic volumes
- Consolidated volumes are transmitted to the RSU (direct, multi-hop)
 - Dissemination is transparent to RSU
- Low V2X penetration is compensated by Smartphones held by drivers and pedestrians in same zones

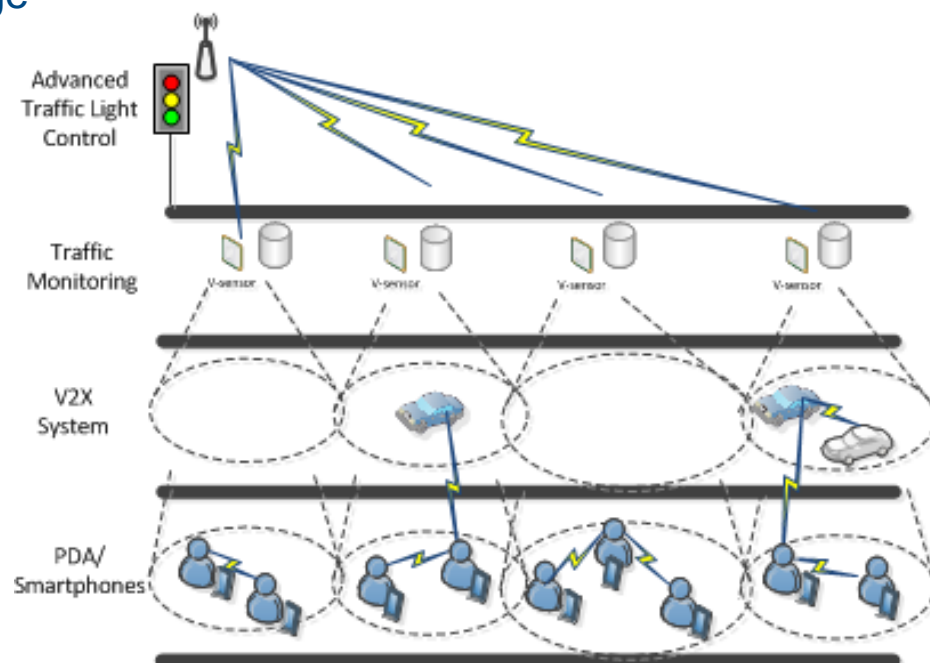

Traffic Surveillance for Traffic Light Control

COLOMBO

- The COLOMBO Traffic Light Control (TLC) requires dynamic and fresh traffic states
 - Arriving flows
 - Leaving flows

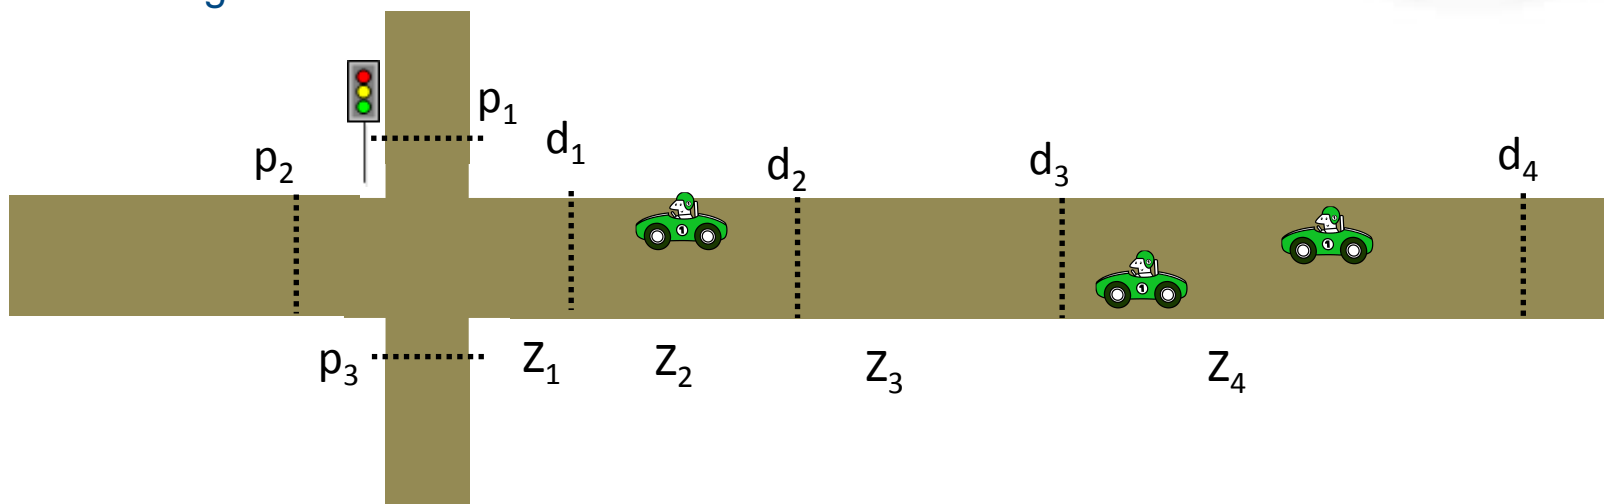


- **Measuring Zones** –
 - Z_x – measured zones $[p_{x-1} - p_x]$, $[d_{x-1} ; d_x]$
 - d_x – measuring distances before TLC
 - p_x – measuring distances after TLC
- **Traffic Dynamics** –
 - Average speed in Z_x
 - Average Density of cars in Z_x
- **Data Quality** –
 - Precision: how close is data from reality?
 - Freshness: how often is data provided?


Traffic state estimate through traffic fundamental diagrams

COLOMBO

- Traffic flows follow three basic fundamental diagrams:

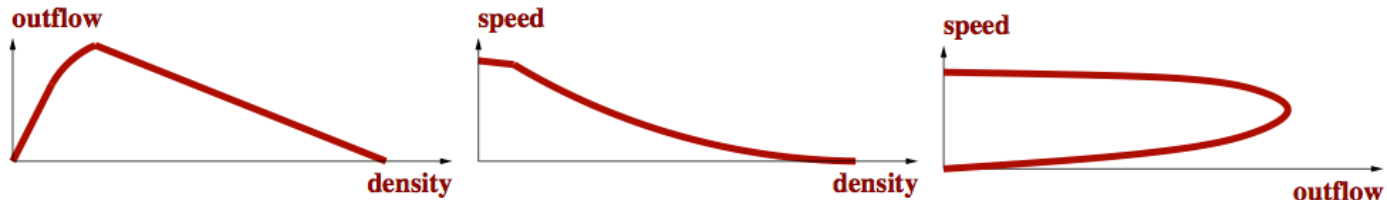

SUMO

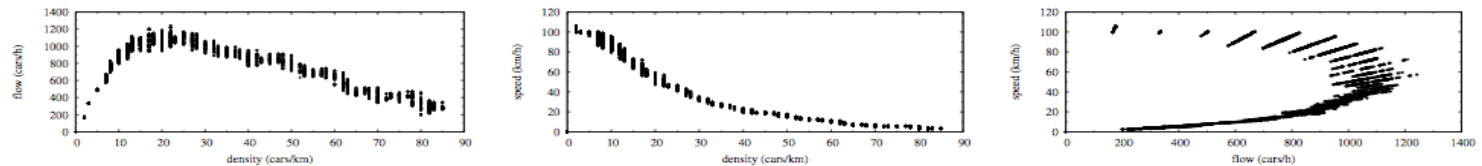


- Traditionally used to validate models and traffic
 - Can be used to extract one component out of 1-2 two others
- Given a known street capacity (# lanes)
 - Speed** can be extracted from **traffic density**
 - Flow** (out) can be extracted from **traffic density**
- One challenge:
 - traffic density...**

Traffic state estimate through data dissemination

COLOMBO

- Related objective:
 - Given vehicular density
 - What is the multi-hop C2X dissemination delay?

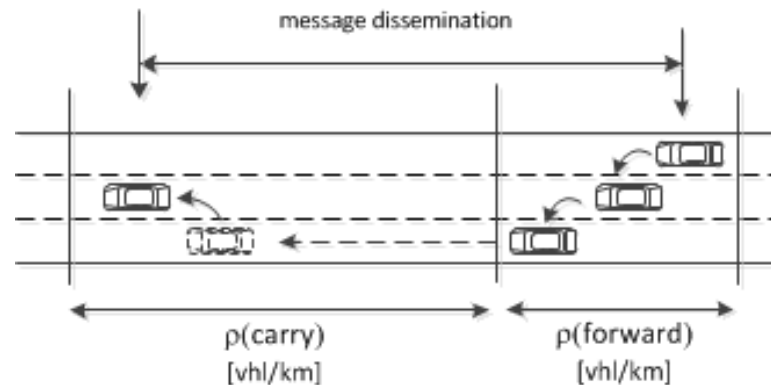

- In COLOMBO: reverting the question
 - Given the **C2X dissemination delay**, what is the **average density** ?
- Tradeoff:
 - Carry: dissemination = vehicular speed
 - Relay: dissemination immediate = Multi-hop percolation exists
 - Laws of Physics: at least 1 vehicle every transmit range
 - Density of vehicle may be estimated !
 - Hybrid: carry takes lead over relay


Traffic state estimate through local neighborhood information




- Reactive Approach – **Distributed Auction**
 - Each node request (broadcast) to be come a cluster leader
 - The node with the maximum request announces it becomes leader
 - Any node receiving this message joint its group

Proactive Approach: **Node Mapping Protocol (NMP)**

- periodically send beacons with information from neighbors (id, position, speed, direction, and **number of known nodes**)
- The node with larger neighbor set becomes leader

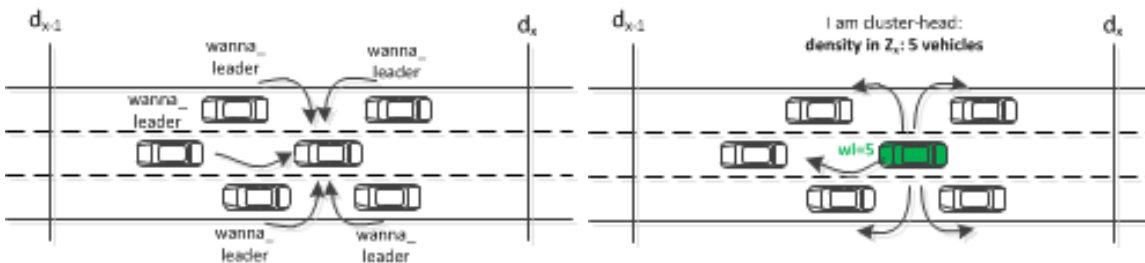



- Cluster Leader:**
 - Gathers the number of neighbors contained in the measured area
 - Fuse and consolidate from missed data
 - Transmit it to the traffic light

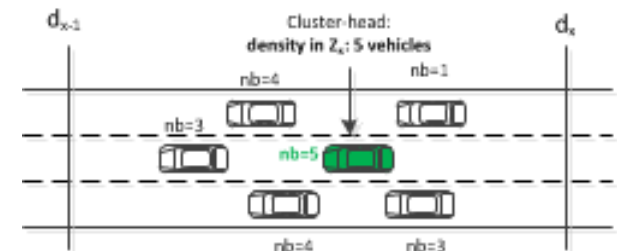

Traffic state estimate - evaluations



- 100% Car type C: Two-way linear scenario, 100% penetration
- Traffic Density:
 - Black: Oracle
 - Red: Proactive
- Observation:
 - ~98% precision in #detected vehicles in each direction

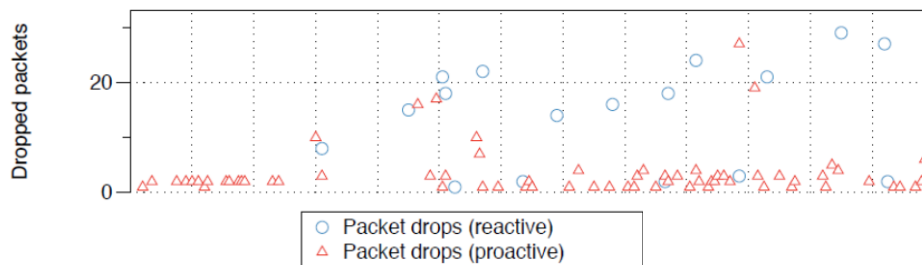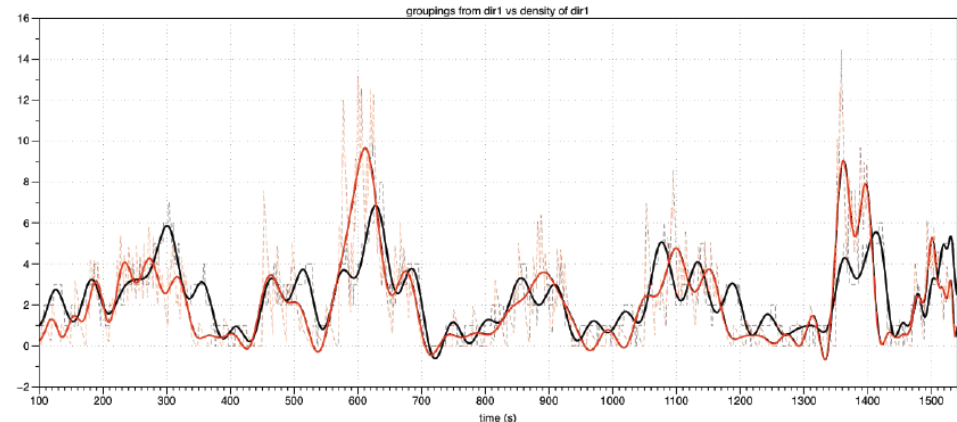

- Packet Losses:
 - Related to channel congestion
 - Hinders quality of fusion protocol
 - Proactive (red) creates less overall (and less critical) collisions than reactive (green)



P. Bellavista, L. Foschini, E. Zamagni, "V2X Protocols for Low-Penetration-Rate and Cooperative Traffic Estimations", to appear in the Proc. of IEEE VTC-Fall 2014, Sept. 2014, Vancouver, Canada.

Traffic state estimate through local neighborhood information



- **Reverse Dissemination:**

- Car entering a zone: transmit a packet
- Last car before leaving the zone: receives the packet

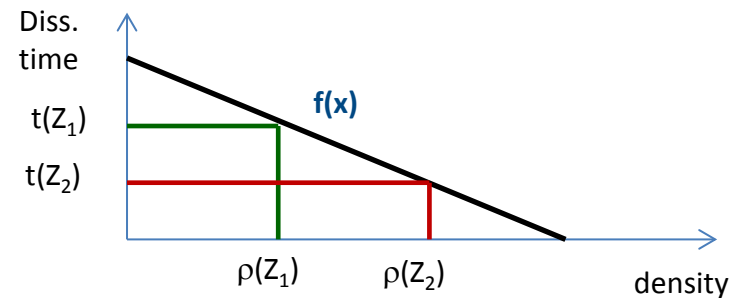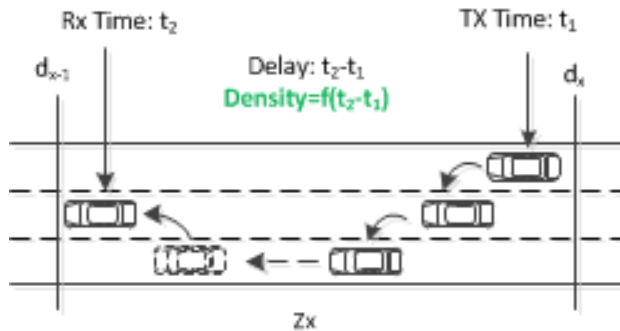

- **Mapping Function $f(x)$:**

- Given dissemination time
 - Provides a respective density
- Mapping function is critical to obtain:
 - Linear function in free-flow
 - Exponential in congested mode

Summary

COLOMBO

- COLOMBO's cooperative & distributed traffic surveillance system has been presented
 - Tailored to traffic light control required data:
 - traffic density / traffic speed – per 'virtual' sensing zone (virtual induction loops)
 - Precise & fresh data (as close as possible to reality)
- Two approaches followed:
 - **Topology-based**: cluster-heads extracts neighborhood visibility (density)
 - **Dissemination-based**: relationship between dissemination time and density
- Some initial results have been presented
 - Data quality close to benchmark (simulated mobility with SUMO)

More information is available at
<http://colombo-fp7.eu/>

Thank you!